


Grade 8 Clevis Sling Hook BS EN1677-1+2

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40C up to 200C without reduction in working load limit.

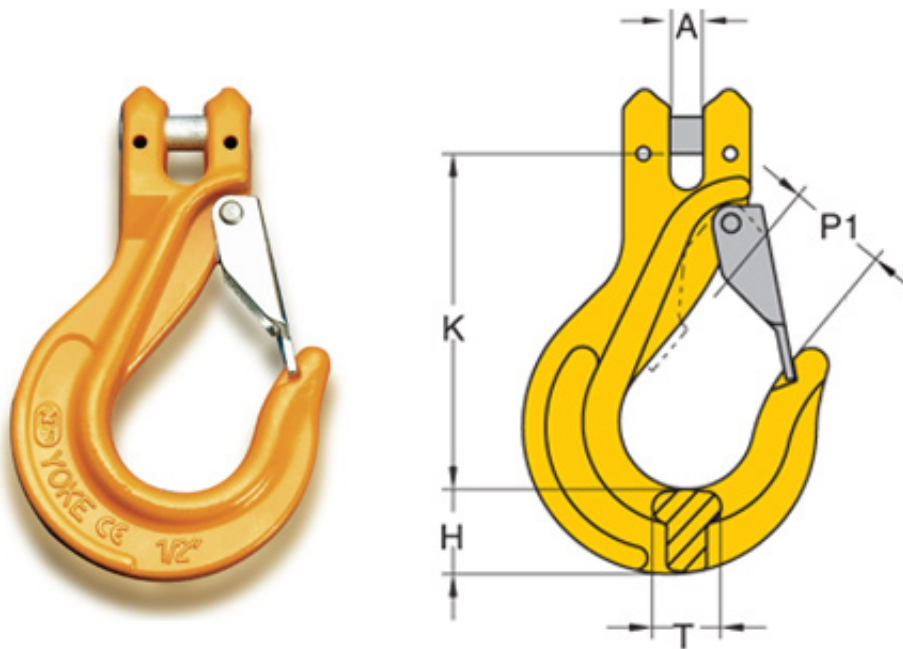

SPECIFICATIONS

Part Code	Chain Size mm	A mm	K mm	P1 mm	T mm	H mm	W.L.L. Tonnes	Box Quantity	Mass Kg
8-043/S-07	7,8	9	98	27	18	22	2.0	30	0.8
8-043/S-10	10	11	121	34	23	29	3.15	15	1.4
8-043/S-13	13	14	147	44	30	37	5.3	8	2.9
8-043/S-16	16	18	166	48	39	42	8.0	6	5.6
8-043/S-20	18, 20	21	200	56	47	50	12.5	4	8.8