


Grade 8 Lifting Chain EN818-2

Hackett Grade 8 Lifting Chain is manufactured from alloy steel and complies fully with EN818-2.

Only chain fully compliant with all aspects of EN818-2 can be used in chain slings certified to EN818-4.

Hackett Grade 8 lifting chain is embossed MA8 and also with class leading batch code marking. The chain is proof load tested to 2.5 times working load limit and is supplied in a black painted finish. The Hackett Grade 8 chain is suitable for use in a temperature range of -40C up to 200C without reduction in working load limit, reductions apply up to 400C.

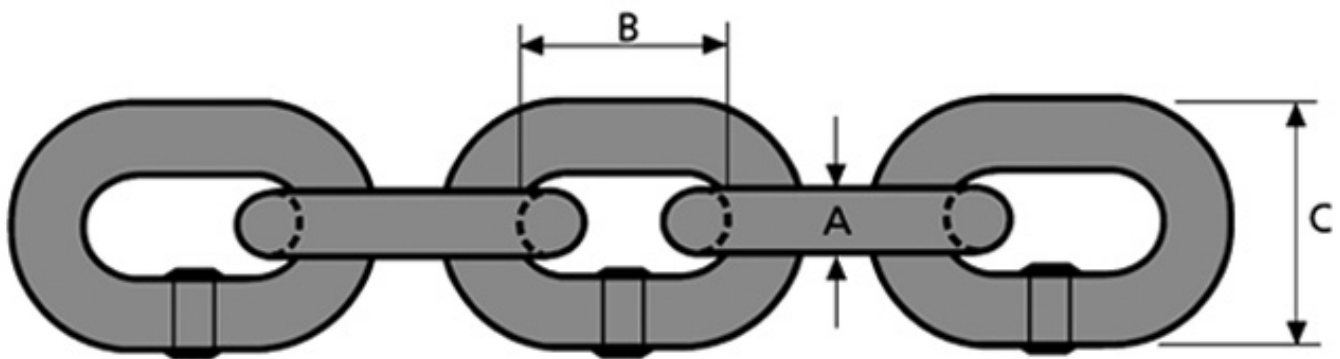

Part code	Chain Size mm	A mm	B mm	C mm	WLL Tonnes	Kgs per metre
AS1.070.5	7	7	21	25.9	1.5	1.1
AS1.080.5	8	8	24	29.6	2.0	1.5
AS1.100.5	10	10	30	37.0	3.15	2.2
AS1.130.5	13	13	39	48.1	5.3	3.8
AS1.160.5	16	16	48	59.2	8.0	5.8
AS1.200.5	20	20	60	74.0	12.5	9.1
AS1.220.5	22	22	66	81.4	15.0	11.0
AS1.260.5	26	26	78	96.2	21.2	15.3
AS1.320.5	32	32	96	118.0	31.5	23.2